




7000 Master Clock Controller

Put everyone on the same page with synchronized timekeeping over multiple departments or work stations. Staff is accountable and punctual, schedules are standardized, productivity is improved, and operations run more efficiently.

TimeTrax Sync™ 7000 Master Clock System continuously transmits time signal to Pyramid TimeTrax Sync™ analog or digital wall clocks. The 7000 also provides power to analog clocks (part #5200, 5217N) and 24V DC bells and horns. The system is able to schedule timed signaling to ring bells or sound horns up to 300 events. Features automatic Daylight Saving Time adjustment.

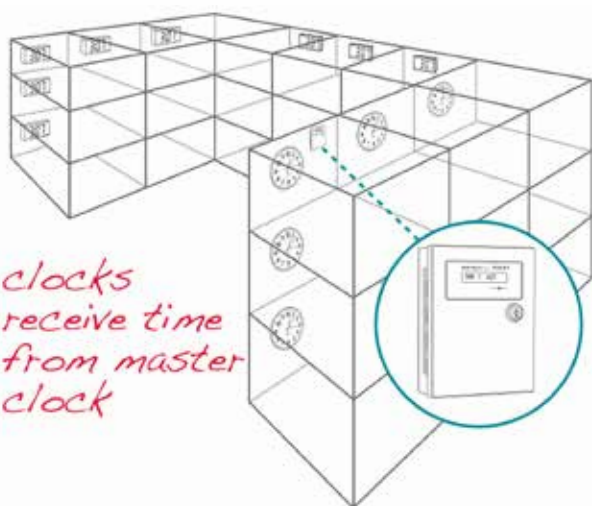

- Synchronizes time across multiple departments or work stations
- Synchronizes up to 200 TimeTrax Sync™ Analog or Digital Wall Clocks
- Signals timed events to ring 24V DC bells or sound horns (7000BLD110 includes 110V AC bell relay)
- Powers up to 8 TimeTrax Sync Analog Clocks (#5200, 5217N), UP TO 35 24V DC bells (part #41361, 41392) and up to 20 24V DC horns (part#41362)
- Schedules up to 300 timed bell or horn events
- Automatic Daylight Saving Time adjustment
- Sturdy steel casing

7000 Master Clock Controller Ordering Information

TIMETRAX SYNC™ MASTER CLOCK CONTROLLERS

7000	TimeTrax Sync™ Master Clock Controller
7000BDL110	TimeTrax Sync™ Master Clock Controller w/110V AC Relay



Model 7000*

*Model 7000BDL110 includes 110V AC Bell Relay for 110V AC bells and horns. Clocks sold separately.





7000 Master Clock Controller

SPECIFICATIONS

Part#	7000
Time Set	Manual
Power Output	800mA
BCD Time Updates	Up to 200 clocks, 35 bells, 20 horns and powers up to 8 Analog Clocks (Part #5200) using RJ45
Operating Temp	-30°F (-34.44°C) to 130°F (54.44°C)
Display	LCD, date & time
Housing	Textured powder coat surface metal
Color	Black
Mounting	Wall Mount
Warranty	1-Year manufacturer's limited warranty
Dimensions	5.5"W x 7.125"H x 1.75"D
Weight	1.81lb (.81kg)
Shipping Weight	4.451lb (2.0kg)

110V (10A@125V AC, 7A@250V AC) BELL RELAY SPECIFICATIONS*

Color	Putty
Mounting	Wall Mount
Dimensions	3.125"W x 5.25"H x 2.625"D
Weight	.75lb (.34gr)
Shipping Weight	1lb (.045gr)

*Included with 7000BDL110.

ACCESSORIES

DIG-4B	4" x 4-digit Red LED Independent Digital Clock
DIG-6B	4" x 6-digit Red LED Independent Digital Clock
41357G	4" x 4-digit Red LED Digital Clock
61357G	4" x 6-digit Red LED Digital Clock
5200*	13" Analog Clock 12 Hour Face
5217N	17" Analog Clock 12 Hour Face
41200	Power Adaptor 120V AC/18V AC
41269	RJ45 BCD Cable, 50'
41314	RJ45 BCD Cable, 100'
41270	RJ45 Y-Splitter Cable
41361	6" 24 Volt DC Bell
41392	8" 24 Volt DC Bell
41362	24V DC Horn
41397R	6" 110V AC Bell, red (7000BDL110 ONLY)
41398G	8" 110V AC Bell, grey (7000BDL110 ONLY)
41362	110V AC Horn (7000BDL110 ONLY)
41449	Bell Wire, 100' Spool
41450	Bell Wire, 250' Spool

*Powers eight 5200 Analog Clocks.



Wired Synchronize Bell Interface




888.479.7264



info@tptime.com


pyramidtimesystems.com

© 2017 Pyramid Time Systems, LLC. All Rights Reserved.

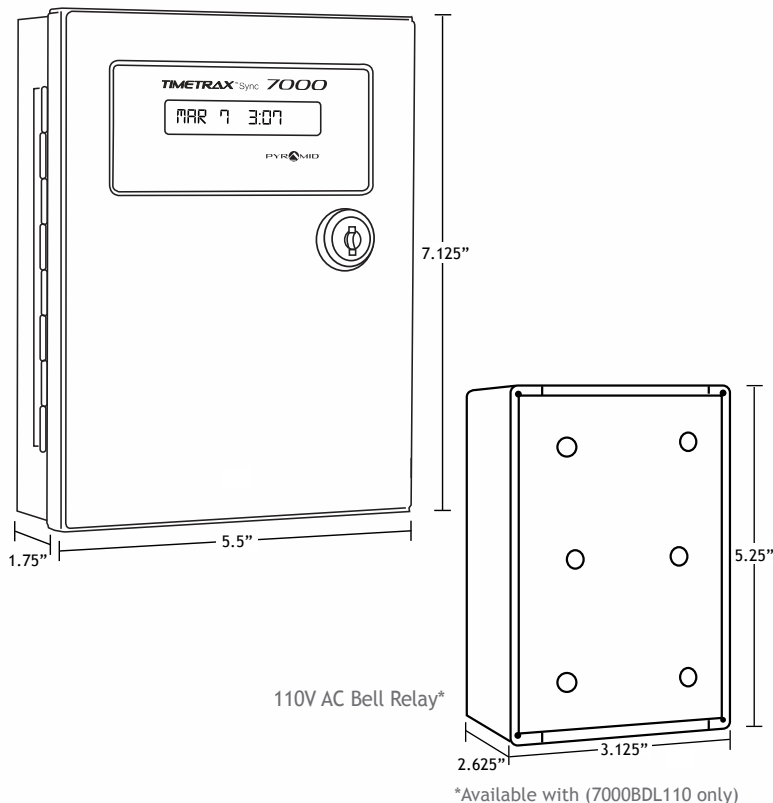

110V AC Bell Relay*

*Available with (7000BDL110 only)

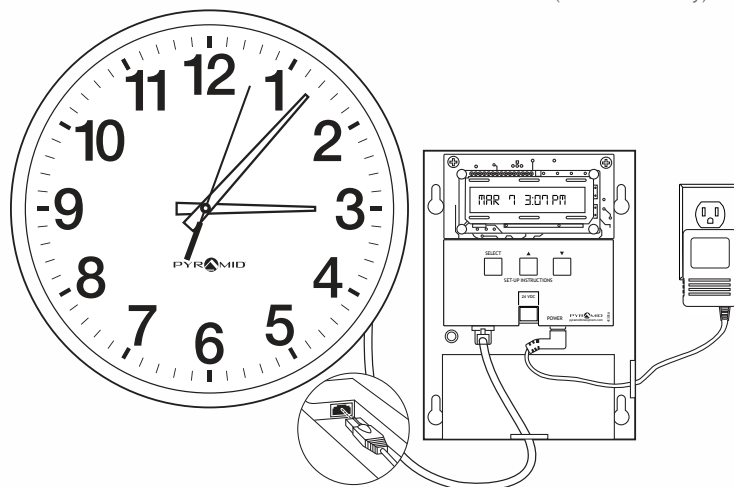

Simple Setup.

Simply plug the Master Clock into a standard electrical outlet and set time. Connect clocks to Master Clock using RJ45 BCD cable, then complete electrical installation of clocks. Up to 200 clocks may be added to the system.

*See user guide for AC bell connection.



FS7000XXX